



SHIPPENSBURG PUMP CO. INC.

P.O. BOX 279, SHIPPENSBURG, PA 17257

PH 717-532-7321 • FAX 717-532-7704

WWW.SHIPCOPUMPS.COM


Pride

Quality

Craftsmanship

BULLETIN 153

Revised 11/19

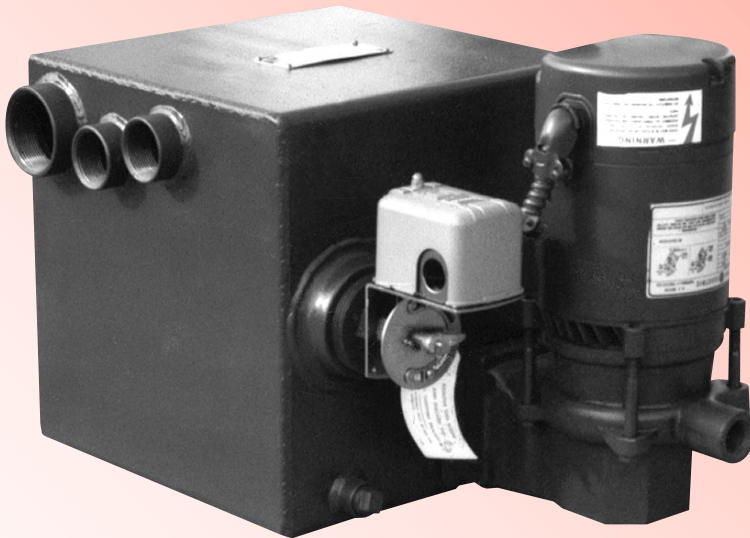

**TYPE LPC
CONDENSATE PUMP
LOW PRICE LASTING PUMP
CUSTOMIZED**

with

Bronze Impeller, Bronze Wear Ring
Dependable Float Switch
Heavy Wall Steel Receiver

ODP MOTORS ONLY

Condensate temperature of unit is generally 200°F.

Temperature is a function of pump NPSH and elevation above sea level.

Certain pumping points have NPSH requirements of 2 feet and therefore can handle 210°F without elevating the receiver.

SHIPCO®
PUMPS are equipped with Mechanical Seals rated up to a standard 250°F.
Higher temperature seals and special faces available upon request.

TYPE LPC CONDENSATE UNITS

CAP. SQ. FT. EDR	PUMP CAP. GPM	PUMP TYPE	PUMP DISCH. PRESS. PSIG	MOTOR HP		PUMP DISCH. SIZE INCHES	CATALOG NO.	REC. CAP. GALS.	INLET SIZE INCHES
				3500 RPM	PHASE				
6,000	9	110	10	1/3	1 or 3	3/4"	60 LPC	15	2"
		110	15	1/3	1 or 3		61 LPC		
		110	20	1/3	1 or 3		62 LPC		
		110	25	1/2	1 or 3		62.5 LPC		
		106	30	1/2	1 or 3		63 LPC		
		106	40	3/4	1 or 3		64 LPC		
		117	50	1-1/2	3		65 LPC		
8,000	12	110	10	1/3	1 or 3	3/4"	80 LPC	15	2"
		110	15	1/3	1 or 3		81 LPC		
		110	20	1/3	1 or 3		82.0 LPC		
		110	25	1/2	1 or 3		82.5 LPC		
		106	30	1/2	1 or 3		83 LPC		
		106	40	3/4	1 or 3		84 LPC		
		117	50	1-1/2	3		85 LPC		
10,000	15	110	10	1/3	1 or 3	3/4"	100 LPC	15	2"
		110	15	1/3	1 or 3		101 LPC		
		110	20	1/3	1 or 3		102 LPC		
		110	25	1/2	1 or 3		102.5 LPC		
		106	30	1/2	1 or 3		103 LPC		
		106	40	3/4	1 or 3		104 LPC		
		117	50	1-1/2	3		105 LPC		
12,000	18	110	10	1/3	1 or 3	3/4"	120 LPC	21	2"
		110	15	1/3	1 or 3		121 LPC		
		110	20	1/3	1 or 3		122 LPC		
		110	25	1/2	1 or 3		122.5 LPC		
		106	30	1/2	1 or 3		123 LPC		
		106	40	3/4	1 or 3		124 LPC		
		117	50	1-1/2	3		125 LPC		
15,000	22-1/2	110	10	1/3	1 or 3	1"	150 LPC	21	2"
		110	15	1/3	1 or 3		151 LPC		
		110	20	1/2	1 or 3		152 LPC		
		106	25	3/4	1 or 3		152.5 LPC		
		106	30	3/4	1 or 3		153 LPC		
		106	40	1	1 or 3		154 LPC		
		117	50	2	3		155 LPC		
20,000	30	110	10	1/3	1 or 3	1"	200 LPC	35	3"
		110	15	1/2	1 or 3		201 LPC		
		110	20	3/4	1 or 3		202 LPC		
		106	25	3/4	1 or 3		202.5 LPC		
		106	30	1	1 or 3		203 LPC		
		106	40	1	1 or 3		204 LPC		
		117	50	2	3		205 LPC		
						1-1/2"			

ODP Motors Only

NOTE: Units are sized at 3 times the normal condensing rate. Upon proper application, units can be sized at 2 times the condensing rate and therefore handle 1-1/2 times the tabled capacity in Sq. Ft. EDR. This is based upon design and operating experience.